






female

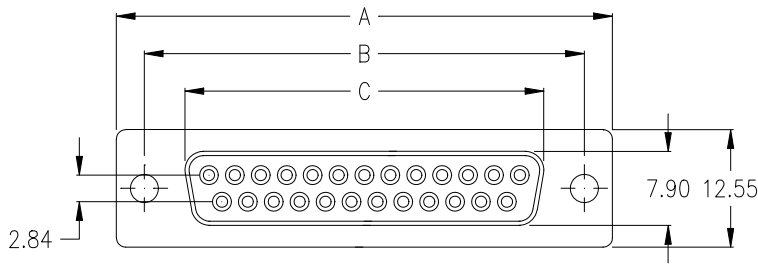

FERRITE SPECIFICATION

No of Contact	Measured Value(OHM)	Test Frequency	Ferrite thickness
009	20 min. 40 min.	25 MHz 100 MHz	1.20mm
015	15 min. 35 min.	25 MHz 100 MHz	
025	15 min. 40 min.	25 MHz 100 MHz	
037	20 min. 50 min.	25 MHz 100 MHz	

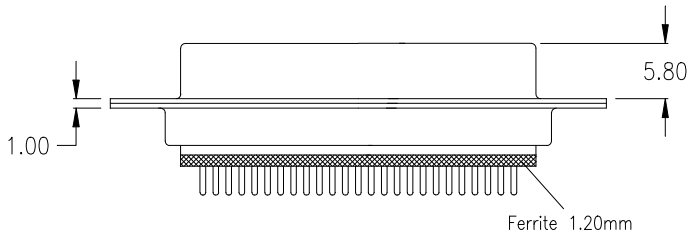

Ordering Code

SDF - xxx - S111 - 95 / F XXX

No. of contacts

Option


Plating: -95= tin(leadfree)/gold

General Specification page 72

No. of contacts	Dimension		
	A	B	C
009	<u>30.81</u> 1.213	<u>24.99</u> .984	<u>16.33</u> .643
015	<u>39.14</u> 1.541	<u>33.32</u> 1.312	<u>24.66</u> .971
025	<u>53.04</u> 2.088	<u>47.04</u> 1.852	<u>38.38</u> 1.511
037	<u>69.32</u> 2.729	<u>63.50</u> 2.500	<u>54.84</u> 2.159


Options

mounting hole
ø 3.05




T0

thread rivet
4-40 UNC




T

Jack Screw
4-40 UNC




TJ

inside thread
4-40 UNC




BR

Jack Screw
4-40 UNC




BRJ


PCB Layout „female“




9 pin

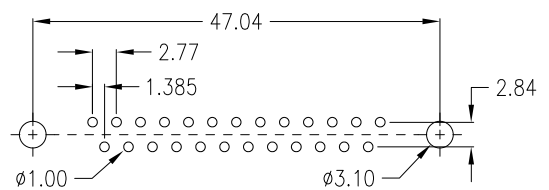

25 pin

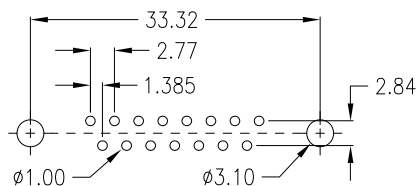

15 pin

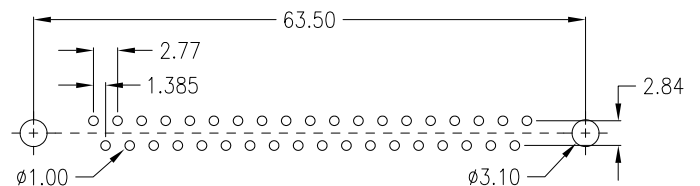

37 pin