



26-pin HD female / 26-pin HD female

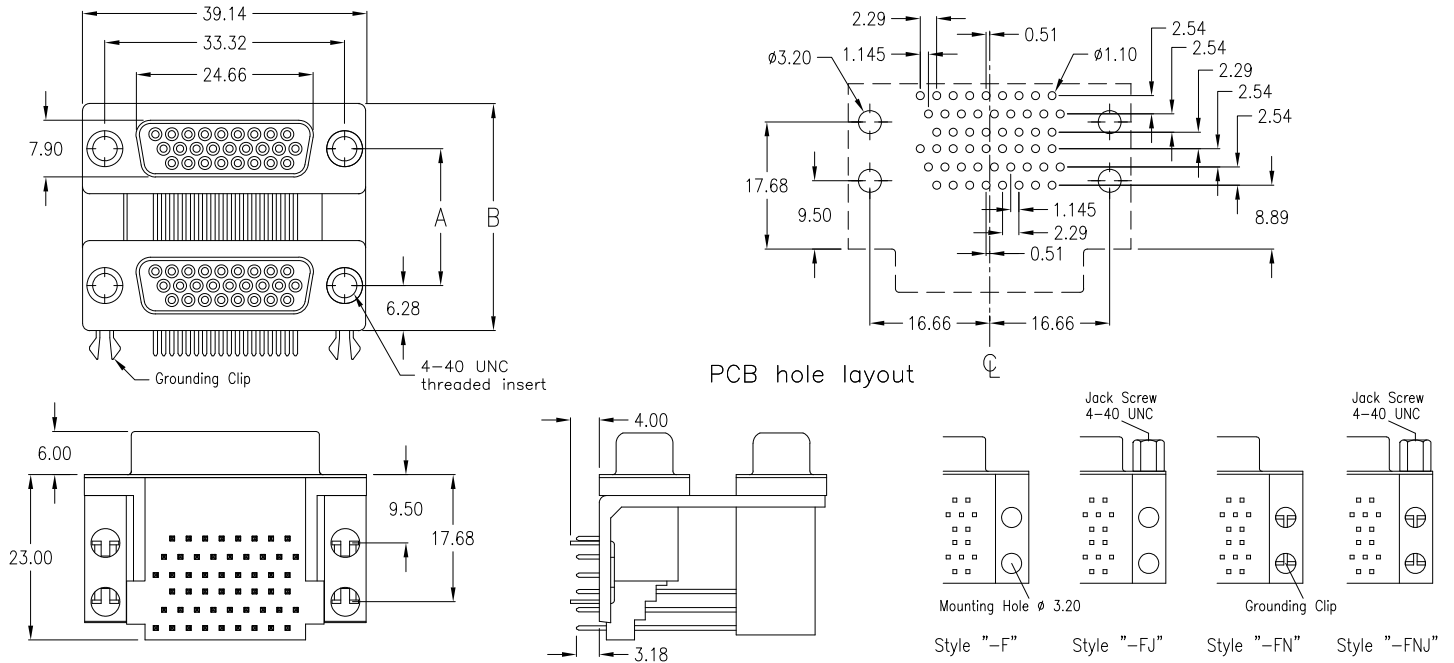

without grounding clips just 4 mounting holes	without grounding clips, just 4 mounting holes; 4 jack screws 4-40 UNC mounted	with 4 grounding clips (as above drawing)	with 4 grounding clips; 4 jack screws 4-40 UNC mounted	Distance Dimensions (mm)	
SDD-H26H26-4-95-F	SDD-H26H26-4-95-FJ	SDD-H26H26-4-95-FN	SDD-H26H26-4-95FNJ	„A“ = 19.05	„B“ = 31.60
SDD-H26H26-5-95-F	SDD-H26H26-5-95-FJ	SDD-H26H26-5-95-FN	SDD-H26H26-5-95FNJ	„A“ = 15.88	„B“ = 28.42

26-pin HD female / 26-pin HD male

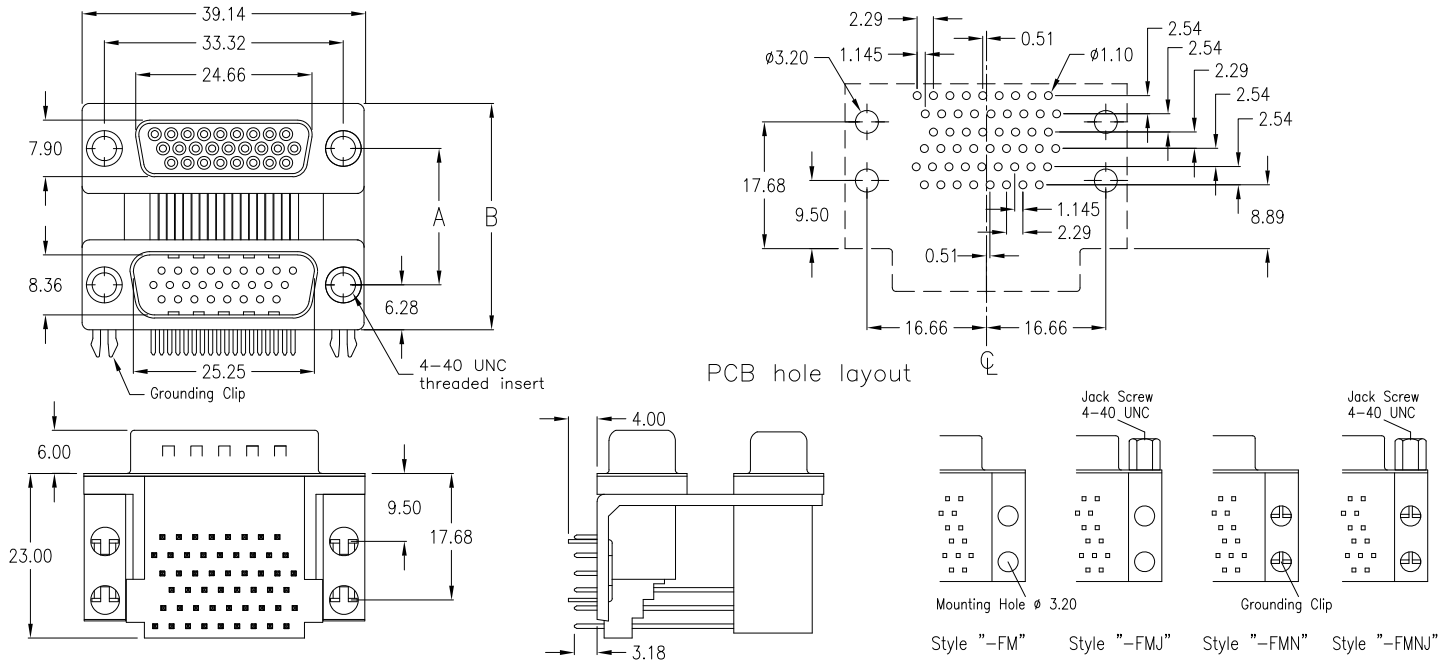

without grounding clips just 4 mounting holes	without grounding clips, just 4 mounting holes; 4 jack screws 4-40 UNC mounted	with 4 grounding clips (as above drawing)	with 4 grounding clips; 4 jack screws 4-40 UNC mounted	Distance Dimensions (mm)	
SDD-H26H26-4-95-FM	SDD-H26H26-4-95-FMJ	SDD-H26H26-4-95-FMN	SDD-H26H26-4-95FMNJ	„A“ = 19.05	„B“ = 31.60
SDD-H26H26-5-95-FM	SDD-H26H26-5-95-FMJ	SDD-H26H26-5-95-FMN	SDD-H26H26-5-95FMNJ	„A“ = 15.88	„B“ = 28.42