Single port vertical; SMT Type

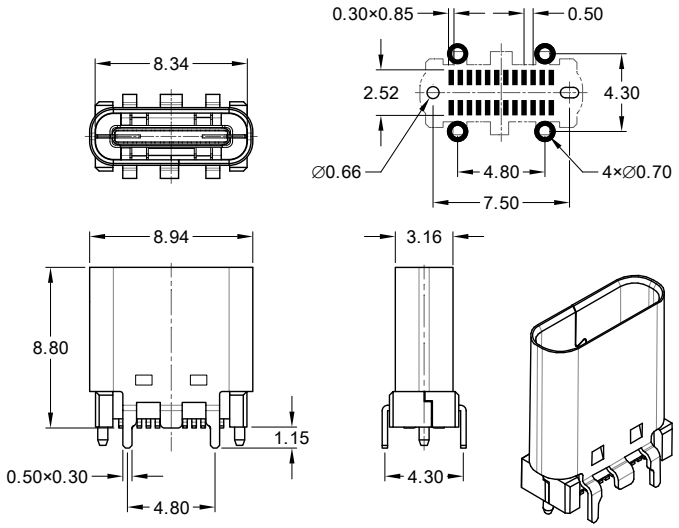

ORDER CODE: **UNS - B24/2 – UC2C130 - 98/B**

Single port right angle; SMT "Embedded" Type

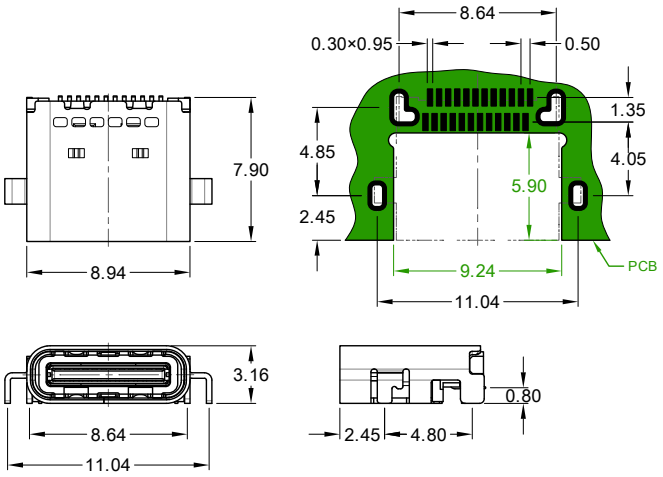

ORDER CODE: **UNS - B24/M – SC1C130 - 98/R**

Single port right angle; SMT/THR "Hybrid" Type

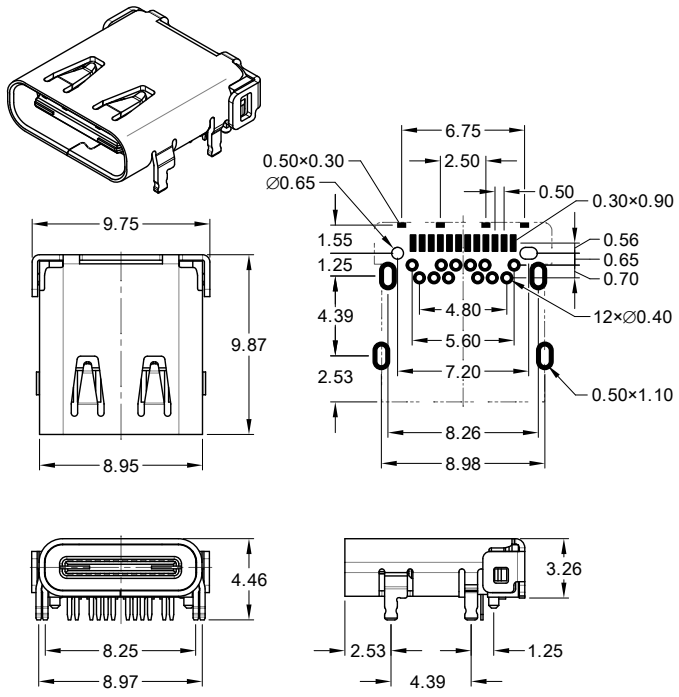

RDER CODE: **UNS - B24 - SRCC130 - 58/R**

Single port right angle; SMT/THR "Hybrid" Type

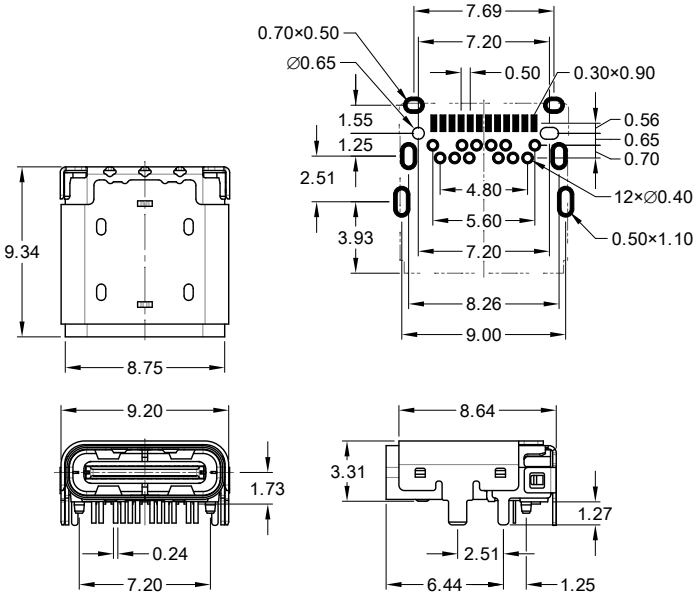

ORDER CODE: **UNS - B24 – SRC1C130 - 98/R**

Specification

Material

Contact	Copper alloy
Plating:	
Solder area	Sn *(leadfree)*
-SRCC130- type	Au flash
Contact area	Au flash/ Au 15μ" / Au 30μ" over Ni
Housing	LCP black UL 94-V0
Shell	Stainless Steel, 50μ" min. Ni plated

Mechanical

Mating cycles	10,000 min.

Electrical

Current rating/contact	1.25A max. (VBUS & GND Contacts)
	0.25A max. (all other)
Voltage rating	20V AC max.
Withstanding voltage	100V AC
Insulation resistance	100MΩ min.
Contact resistance	40mΩ max.

Others

Operating temperature	-30° C to +80° C
Processing temperature (THR)	+260°C +0/-5°C for 5 seconds