


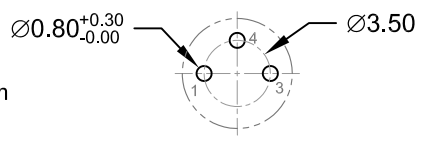



REV.	DESCRIPTION	DATE	DRAWN
A	New	23.12.2019	Ryan

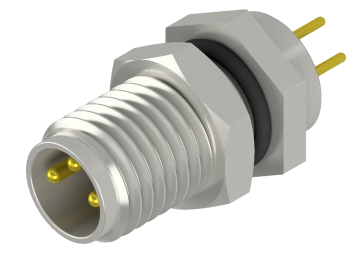

Order Code
M08-MA03-TVFP-55/00

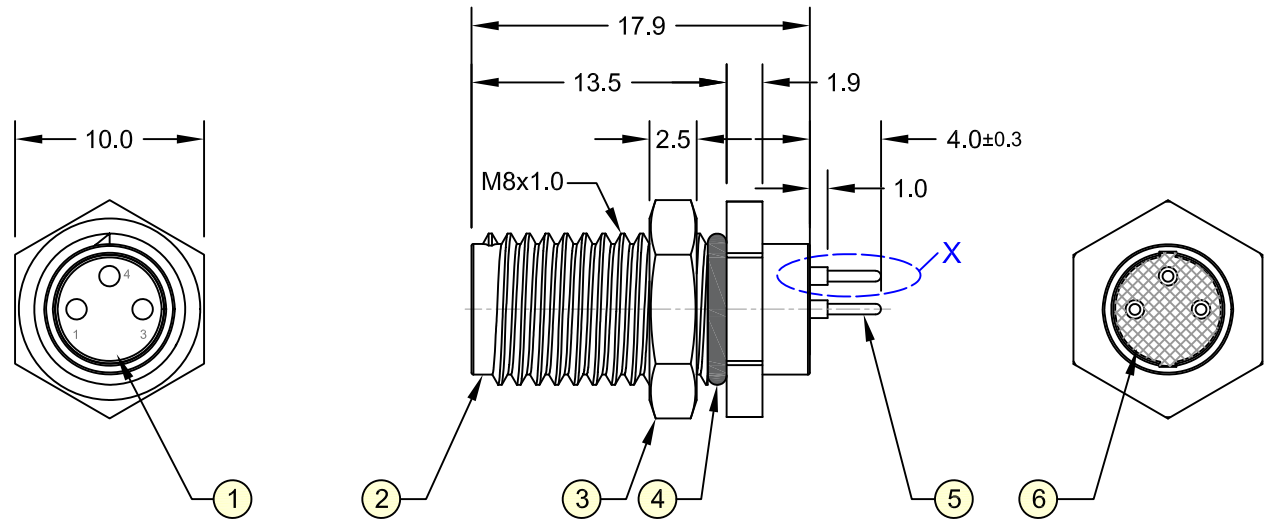

Specifications

Electrical
Current rating: 3A per contact
Insulation resistance: 100MΩ min.
Voltage rating: 60V AC/DC


Mechanical Requirements

Waterproof rate: IP68
Recommended panel thickness: 0.80 to 4.00mm
Recommended Torque: 6~7 kgf-cm
Operating life: 100 cycles min.

In accordance with IEC 61076-2-104: 2014

Item	Part Name	Materials / Finish(Color)	Q'TY
1	Housing	Thermoplastic / Black	1
2	Metal Body	Copper Alloy / Ni Plated	1
3	Hex Nut	Copper Alloy / Ni Plated	1
4	O-Ring	NBR / Black	1
5	Contact	Copper Alloy / Au Plated	3
6	Glue	Epoxy / Black	-

E-tec 2019 © - all rights reserved www.e-tec.asia

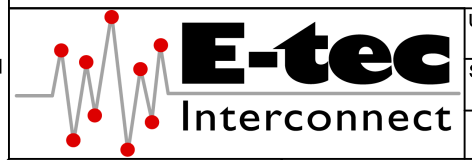

UNIT	mm	GENERAL TOLERANCE		DRAWN	Ryan	DATE	23.12.2019
SCALE	Free	X.° ±	X. ±	CHECK	Cheng	DATE	02.01.2020
		.XX° ±	.XX ± 0.50	APPROVE	Fagi	DATE	02.01.2020
		.XXX° ±	.XXX ±				

DWG. NO.	M08-MA03-TVFP-55/00
SERIES NO.	M08-MA03-TVFP-55/00
SHEET 1/1	REV. A

M8 Circular Connector
3-Pin Male A - Coding Type
THT - Panel Front Mount