


2.00mm Wire to Board Crimp Contact Connectors



K - Type Single Row


female plug

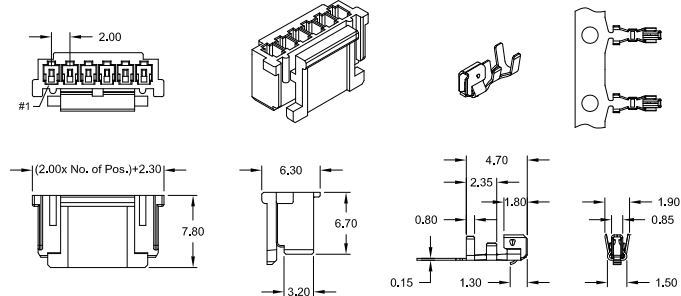

Order Code housing: CRF-1xx-K200

contact: CRF-999/30-K200-99


-SMT- male header right angle (side entry)

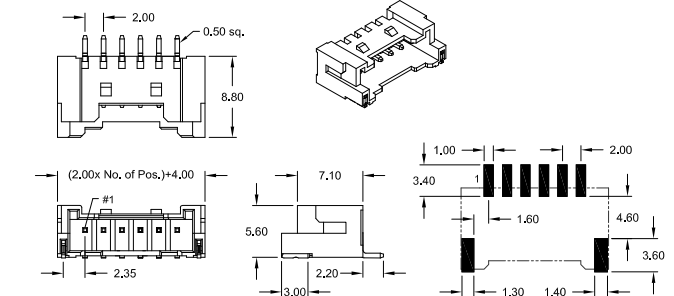

Order Code right angle: CRR-1xx-SK200-xx/X

P - Type Single Row


female plug

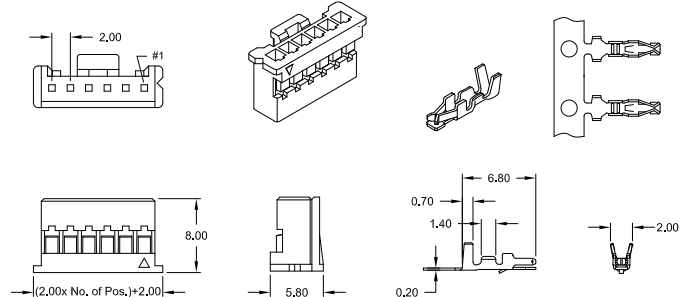

Order Code housing: CRF-1xx-P200

contact: CRF-999/27-DP200-xx

-THT- male header straight (top entry) & right angle (side entry)

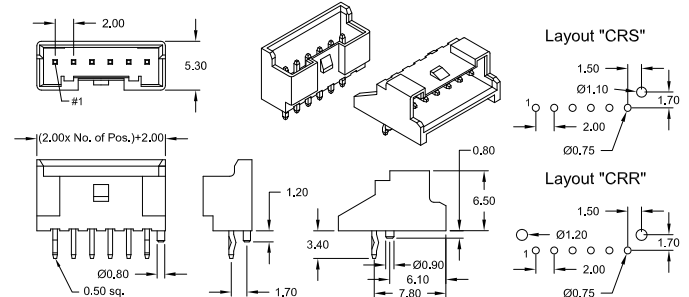


Order Code straight: CRS-1xx-P200-99/P

right angle: CRR-1xx-P200-xx/P

SH - Type Single Row


female plug

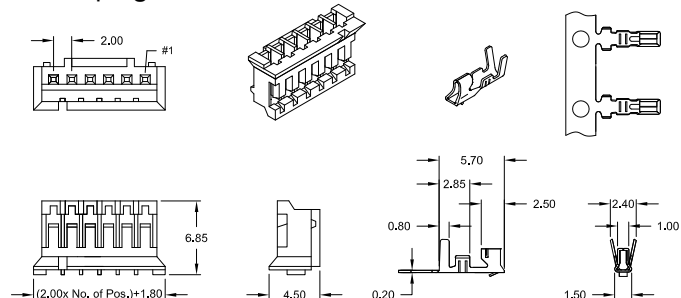

Order Code housing: CRF-1xx-SH200

contact: CRF-999/30-SH200-99

-SMT- male header straight (top entry) & right angle (side entry)

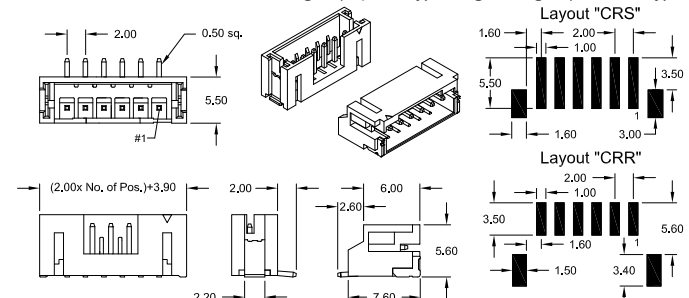

Order Code straight: CRS-1xx-SH200-99/X

right angle: CRR-1xx-SH200-99/X

Specification

Current rating	2 A	Operating temperature	-25°C to +85°C	Contact material	Copper Alloy
Insulation resistance	1000 MΩ min.	if PA6T	-40°C to +105°C	Insulator material	all UL 94 V-0
Contact resistance	20 mΩ max.	SMT Processing temp.	+250°C for 5 sec.	CRF-P; K & SH	PA66
Voltage rating	250 V AC max.			CRS- & CRR-P	PBT
Withstanding voltage	800 V AC			CRS-SH; CRR-SH	PA6T SK = PA9T

How to order

CR X - x xx - X 200 - xx /X

Type	Rows	Nbr of contacts	Execution	Plating	Packing
F = Female R = R/A male S = Straight male	1 = single row <i>if Crimp Contact:</i> 9	04 - 20 = K - Type 02 - 15 = P - Type 02 - 16 = SH - Type <i>if Crimp Contact: (MOQ: 10K / reel)</i> 99/27 = AWG 22~28 99/30 = AWG 24~30	K P SH SK DP for details see above dwg's	99 = Tin <i>(leadfree)</i> 55 = Gold other platings on request	<i>only if SMT Type</i> /B = Reel with Pickup Cap /R = Reel w/o Pickup Cap