











1.27mm Pin Header & Board Spacer

1.27mm x 2.54mm Board Spacer



SL1

SL2


SP1

SP2

Specifications

Current rating	1 A
Insulation resistance	1000 MΩ min.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Contact material (RoHS compliant)	Copper Alloy
Insulator material (RoHS compliant)	PA6T UL 94 V-0

PCB Hole Layout

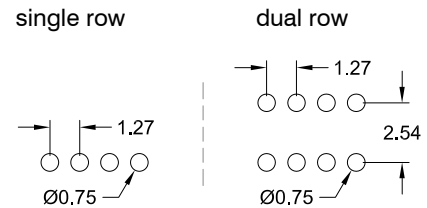

How to order

S xx - xxx - S xxx/xx - **55/1**

Rows single plastic	Nbr of pins	Pin code	DIM "A"	DIM "B"	Plating
L1 = single row	single row = 003 to 050	079/01	2.80 mm	2.60 mm	
L2 = dual row	dual row = 006 to 100	091/02	4.00 mm	2.60 mm	
		111/01	6.00 mm	2.60 mm	
		164/01	2.50 mm	11.40 mm	
		179/01	12.30 mm	3.10 mm	
		other dimensions on request			
Rows Boardspacer	Nbr of pins	Pin code	DIM "A"	DIM "B"	DIM "C"
P1 = single row	single row = 003 to 050	084/01	1.10 mm	1.30 mm	6.00 mm
P2 = dual row	dual row = 006 to 100	116/01	2.80 mm	2.60 mm	6.20 mm
		152/01	6.00 mm	3.00 mm	6.20 mm
		127/01	2.20 mm	2.20 mm	8.30 mm
		137/01	3.00 mm	2.30 mm	8.40 mm
		160/06	3.00 mm	4.00 mm	9.00 mm
		210/06	5.50 mm	2.50 mm	13.00 mm
		218/01	6.00 mm	1.80 mm	14.00 mm
		other dimensions on request			