


Application and Features

- **Standard:**
Tray packing for S510 & R510 Style
Tube packing for H510 Style
- Designed to mate with IDC female connector IDS-xxx-W050-55/P
- Reliable flat cable to PCB connection
- No ejection latches for space saving

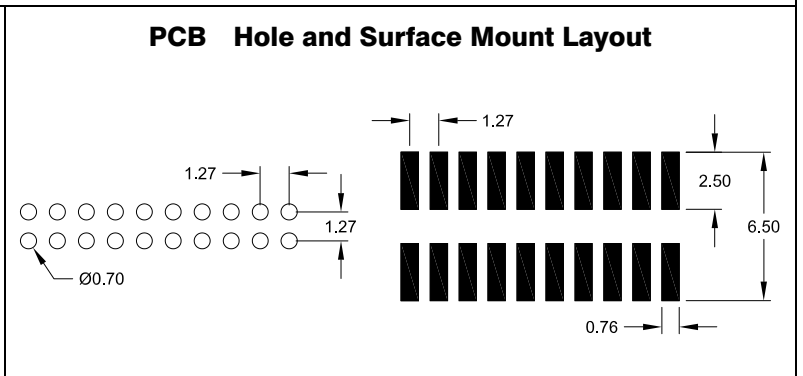

Specifications		
Current rating	1 A	Operating temperature - 40°C to +105°C
Insulation resistance	1000 MΩ min.	Processing temperature (SMT) +250°C +0/-5°C for 5sec.
Withstanding voltage	500 V AC	Contact material (RoHS compliant) Copper Alloy
		Insulator material (RoHS compliant) LCP UL 94 V-0

How to order

SLS - xxx - X 510 - 55/11 (X)

Nbr of pins	Pin Style	Plating	Option only for - H510 - Style
010; 012; 014; 016 020; 024; 026; 028 030; 034; 040; 044 050; 060; 064; 068 080; 100	S = straight R = right angle H = SMT	55 = Gold other platings on request	A = Tube packing; with "PickUp Cap" B = Reel packing; with "PickUp Cap"