


**Specifications**

Current rating	2 A
Insulation resistance	1000 MΩ min.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Contact material	(RoHS compliant) Copper alloy
Insulator material	(RoHS compliant) PA6T UL 94 V-0

**PCB Hole Layout**

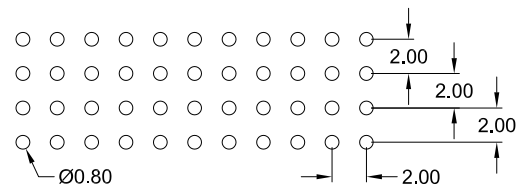

**Application and Features**

Designed for “board to board” small spacing interconnection  
 Variable terminal length available  
 With standoff’s for post solder cleaning  
 Mate with Female Header BL4 – xxx – S630/x – xx/2

**How to order**

SL4 - xxx - S xxx/x - 55/2

Nbr of pins
008 to 160

Pin code	DIM “A”	DIM “B”
830/0	4.40 mm	2.40 mm
830/1	8.60 mm	3.60 mm
830/2	3.20 mm	3.50 mm
830/3	12.00 mm	2.40 mm
830/4	7.40 mm	2.70 mm
other dimensions on request		

Plating
55 = Gold
other platings on request