

Foot Style: **085**


185

085

Application and Features

- **Standard: Tube packing and without "PickUp Cap"**
- Low Profile Insulator
- Assures reliable PC Board connections
- Mate with Female Header 2.00mm pitch

PCB Surface Mount Layout

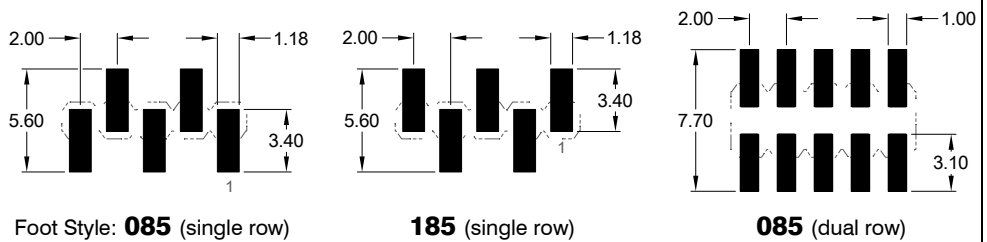

Foot Style: **085** (single row)

185 (single row)

085 (dual row)

Specifications

Current rating	2 A	Operating temperature	- 40°C to +105°C
Insulation resistance	1000 MΩ min.	Processing temperature	+250°C +0/-5°C for 5sec.
Withstanding voltage	500 V AC	Contact material	(RoHS compliant) Brass
		Insulator material	(RoHS compliant) PA6T UL 94 V-0

How to order

SS x - xxx - H xxx / x - 55/2 X

Rows	Nbr of pins	Foot Style	Pin code	DIM "A"	Plating	Packing and „PickUp Cap“ Option
1 single row	002 to 040	085 185 <small>Pls. choose 085 Style if odd pin count.</small>	0	4.73 mm	55 = Gold other platings on request	A = Tube packing; with „PickUp Cap“ B = Reel packing; with „PickUp Cap“
			1	6.00 mm		
2 dual row	004 to 080	085	2	13.57 mm		
			3	6.50 mm		
			4	8.07 mm		
			5	7.62 mm		
			6	9.10 mm		
			7	10.00 mm		
			other dimensions on request			