


Style **630/0**

Style **630/1**

Specifications

Current rating	2 A
Insulation resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Contact material <i>(RoHS compliant)</i>	Phosphor Bronze
Insulator material <i>(RoHS compliant)</i>	LCP UL 94 V-0

PCB Hole Layout

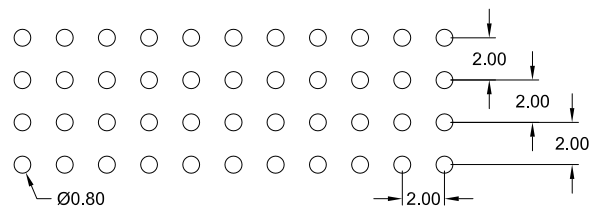

Application and Features

Low and high Profile PC/104-Plus Type
 Designed for "board to board" small spacing interconnection
 With standoff's for post solder cleaning
 Mate with Pin Header SL4 - xxx - S830/x - xx/2

How to order

BL4 - xxx - S xxx/x - 55/2

Nbr of contacts
008 to 160

Style	Dimension above PCB
630/0 <i>(standard)</i>	6.35 mm
630/1 <i>(raised)</i>	9.35 mm
other dimensions on request	

Plating
55 = Gold
other platings on request