

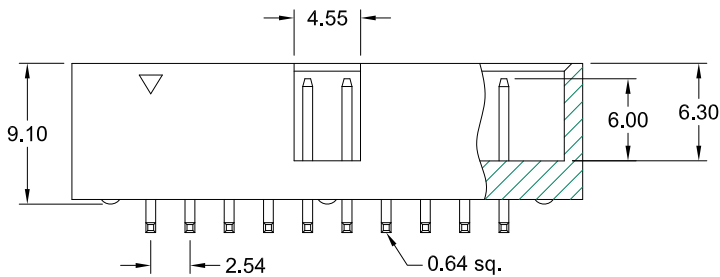



"PickUp Cap"  
Optional

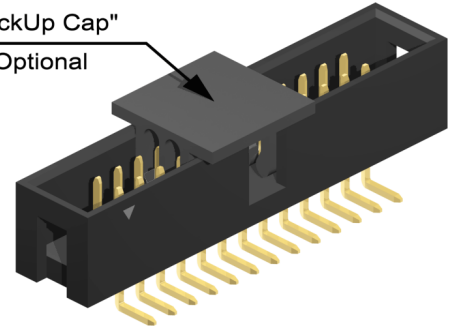

**Application and Features**

- **Standard: Tray packing and without "PickUp Cap"**
- Also available "Reel" packing
- Mating devices for Female Headers, solder tail and IDC Type
- Reliable flat cable to PCB connection
- No ejector latches for space saving

**PCB Surface Mount Layout**

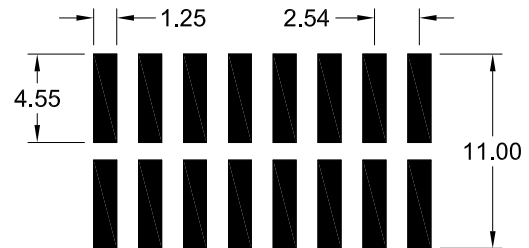

**Specifications**

Current rating	3 A
Insulation resistance	1000 MΩ min.
Withstanding voltage	500 V AC

Operating temperature	- 40°C to +105°C
Processing temperature	+250°C +0/-5°C for 5sec.
Contact material	(RoHS compliant) Brass
Insulator material	(RoHS compliant) PA6T UL 94 V-0

**How to order**

SLS - xxx - H885 - 55 / X

Nbr of pins
006; 008; 010; 012
014; 016; 020; 024
026; 030; 034; 040
044; 050

Plating
55 = Gold
other platings on request

Packing and „PickUp Cap“ Option
F = Tray packing; with „PickUp Cap“
T = Tube packing; without „PickUp Cap“
A = Tube packing; with „PickUp Cap“
B = Reel packing; with „PickUp Cap“