



PCB Hole Layout

single row - 3.96 mm & 5.08 mm pin spacing

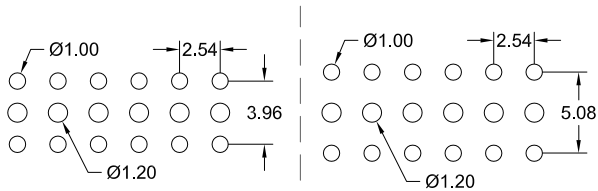

dual row - 6.50 mm & 7.62 mm pin spacing

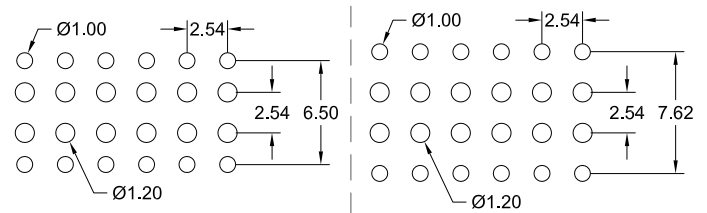

Application and Features

- Hi-rel dual beam contact assures reliable PCB connections
- Dual entry design for board stacking
- Accepts 0.64mm square pins
- Stand-off's facilitate post solder cleaning

Specifications

Current rating	3 A
Insulation resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Contact material <i>(RoHS compliant)</i>	Phosphor Bronze
Insulator material <i>(RoHS compliant)</i>	LCP UL 94 V-0

How to order

BB x - x xx - B850 - 55

Rows	Pin spacing	Nbr of contacts	Plating
1 = single row	4 = 3.96 mm 5 = 5.08 mm	single row = 02 to 40	55 = Gold
2 = dual row	6 = 6.50 mm 7 = 7.62 mm	dual row = 04 to 80	