




Extended Actuator

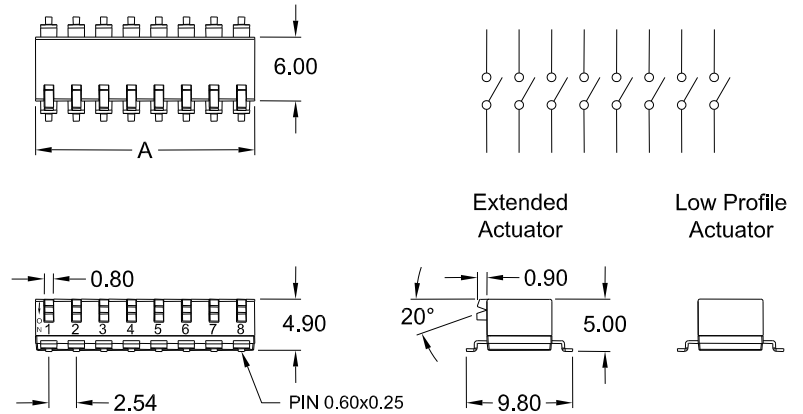


Low profile Actuator




Position	2	4	6	8	10
Dim. "A"	4.98	10.06	15.15	20.22	25.30

Unit: mm

Construction



PCB SMT Layout

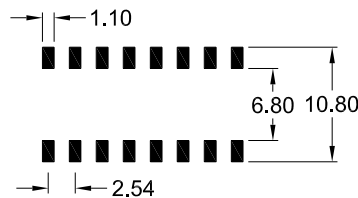

Precautions in Handling

Do not wash the switch!
Washable Type not available.

SPECIFICATIONS

Electrical data

Contact Rating	25 mA, 24 V DC
-switching	100 mA, 50 V DC
Contact Resistance	
-initial	100 mΩ max.
-after life test	200 mΩ max.
Insulation Resistance	100 MΩ min. at 500 V DC
Withstanding Voltage	500 V AC for 1 Minute
Capacitance between adjacent switches	5 pF max.

Mechanical and Environmental data

Operating Temperature	- 20°C to +85°C
Storage Temperature	- 40°C to +85°C
Soldering Temperature	
-SMT reflow soldering	250°C +0/-5°C for 10 sec.
Operating Force	800 gf max.
Mechanical Life	2000 operations
Vibration	10 Hz – 50 Hz – 10 Hz for 6 hours

FEATURES

- End stackable for standard 2.54mm (.100") integrated circuit pitch
- Twin contact design to ensure stable contact
- All plastics used are UL 94V-0 grade fire retardant
- Gold plated contacts, contact & solder area (*gold/gold*), to ensure low contact resistance

How to order

DPM – 1 xx – XX 1 xxZ

Nbr of positions

see under position/dimension box above

Example:
2 Position = 02
4 Position = 04
etc.

Actuator and "ON/OFF" Position

EA	= Extended Actuator; Top side OFF
EB	= Extended Actuator; Top side ON
LA	= Low profile Actuator; Top side OFF
LB	= Low profile Actuator; Top side ON

Packing

10	= Tube packing
11	= Reel packing
10	= Tube packing
11	= Reel packing
T0	= Tube packing & Tape sealed
T1	= Reel packing & Tape sealed