



DRD-1 xx-XR Z (Flat Type)





16 POSITIONS



10 POSITIONS




8 POSITIONS

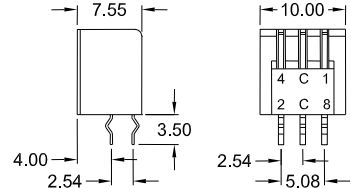

PIN 0.60x0.25


DRD-2 xx-XR Z (Shaft Type)





16 POSITIONS



10 POSITIONS




8 POSITIONS

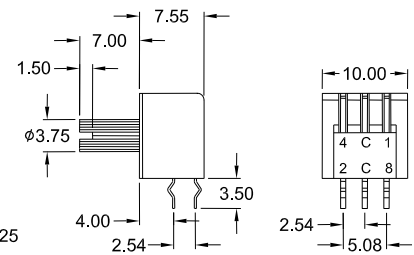


PIN 0.60x0.25

Construction



PCB Hole Layout



Code

Pin No.	POSITION															
	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
1	○	●	○	●	○	●	○	●	○	●	○	●	○	●	○	●
2	○	○	●	○	○	○	○	○	○	○	○	○	○	○	○	○
4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

● Real Code

○ Complementary Code

Rotor color: White

Rotor color: Red

SPECIFICATIONS

Electrical data

Contact Rating	
-switching	25 mA, 24 V DC
-non-switching	100 mA, 50 V DC
Contact Resistance	
-initial	50 mΩ max.
-after life test	100 mΩ max.
Insulation Resistance	1000 MΩ min. at 100 V DC
Withstanding Voltage	250 V AC for 1 Minute

Mechanical and Environmental data

Operating Temperature	- 25°C to +70°C
Storage Temperature	- 40°C to +85°C
Operating Force	500 gf-cm max. (torque)
Mechanical Life	2000 steps per position
Vibration	10 Hz – 50 Hz – 10 Hz for 6 hours

FEATURES

- Molded-in terminals and fully sealed construction
- Standard 2.54mm grid dimension
- All plastics are UL 94V-0 grade fire retardant
- Reliable contact and long-term stability

- Binary decimal (8 or 10 positions) and hexadecimal (16 positions), real and complementary codes available
- Gold plated contacts to ensure low contact resistance. Terminals Tin plated.

How to order

DRD – X xx – XX Z

Rotor
1 = Flat Type
2 = Shaft Type

Nbr of positions
08; 10; 16

Code
RR = Real 2.54mm grid
CR = Complementary 2.54mm grid